


Model No: OEM-UB02/UB034/UB016

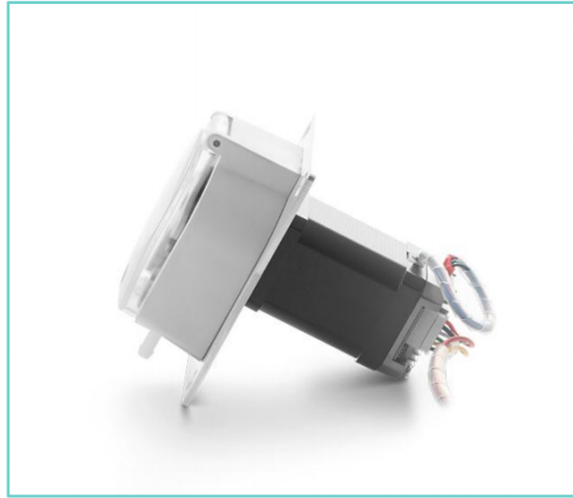

■ Product Introduction

PES material, transparent protecting cover, easily to observe the working situation of pump head and tubing at any time. Various of colors are available. There is water-proof groove in the pump head mounting side. Can use stepper motor, DC motor, AC motor and so on to drive.

■ Typical Application

Widely used in industrial washing machines, dishwashers, fermentation tanks, analytical instruments supporting.

■ Flow Data


Model	Housing Material		Tubing		Speed range(rpm)	Flow rate(mL/min)	Weight(kg)
	Body	Protective Cover	Tubing size	ID×Wall thickness(mm)			
UD15	PSF	Transparent PC	16#	3.1×1.6	0.1-350	0.08-280	0.12
			25#	4.8×1.6		0.16-580	
			17#	6.4×1.6		0.26-930	

■ Technical Specifications

Model No.	OEM-UB02/OEM-UB016
Speed range	0.1-350 rpm
Flow rate range	0.08-930mL/min
Speed control	OEM-B02: Preset speed or serial port control
	OEM-B016: Adjust speed by internal potentiometer
Motor type	42 stepper motor
Power supply	DC24V,>36W
Working environment	0-40°C, 80%RH

Model No.	OEM-UB034
Speed range	0.1-350rpm
Flow rate range	0.08-930mL/min
Speed control	Internal fixed speed mode (configurable via DIP switch and communication) and external input pulse frequency speed regulation
Subdivision settings	1/16(recommend),1,1/2,1/4,1/8,1/32
Motor type	42 stepper motor
Power supply	DC 24V, ≥36W
Working environment	0-40°C, <80%RH

■ Dimension Drawing (Unit:mm)

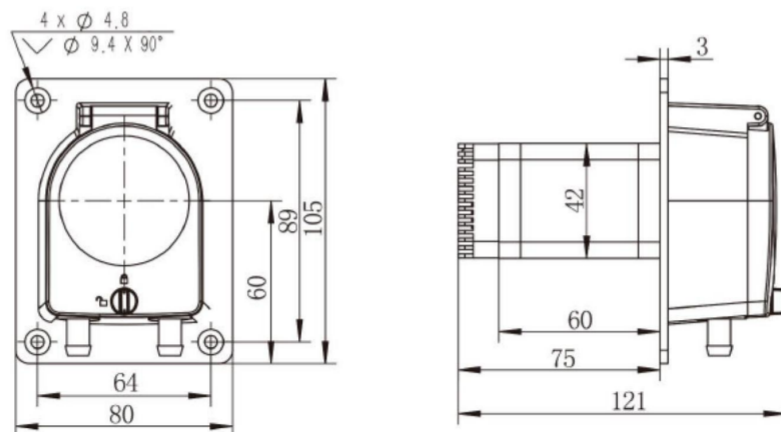

■ Tubing Installation Procedure



A. As below picture, turn the holding pin to unlocking position.



B. Open the transparent cover.



C. Install the tubing.



D. Close the transparent cover, and turn the holding pin to unlocking position.